Technical Data

SPS8000

Serial number:

DB-030

Version:07/2016

SANY PALFINGER SPV EQUIPMENT CO.,LTD
Rudong Development Zone, Nantong, Jiangsu, China
Service Hotline: +86 4008 878318
www.sanypalfinger.com

SPS12500

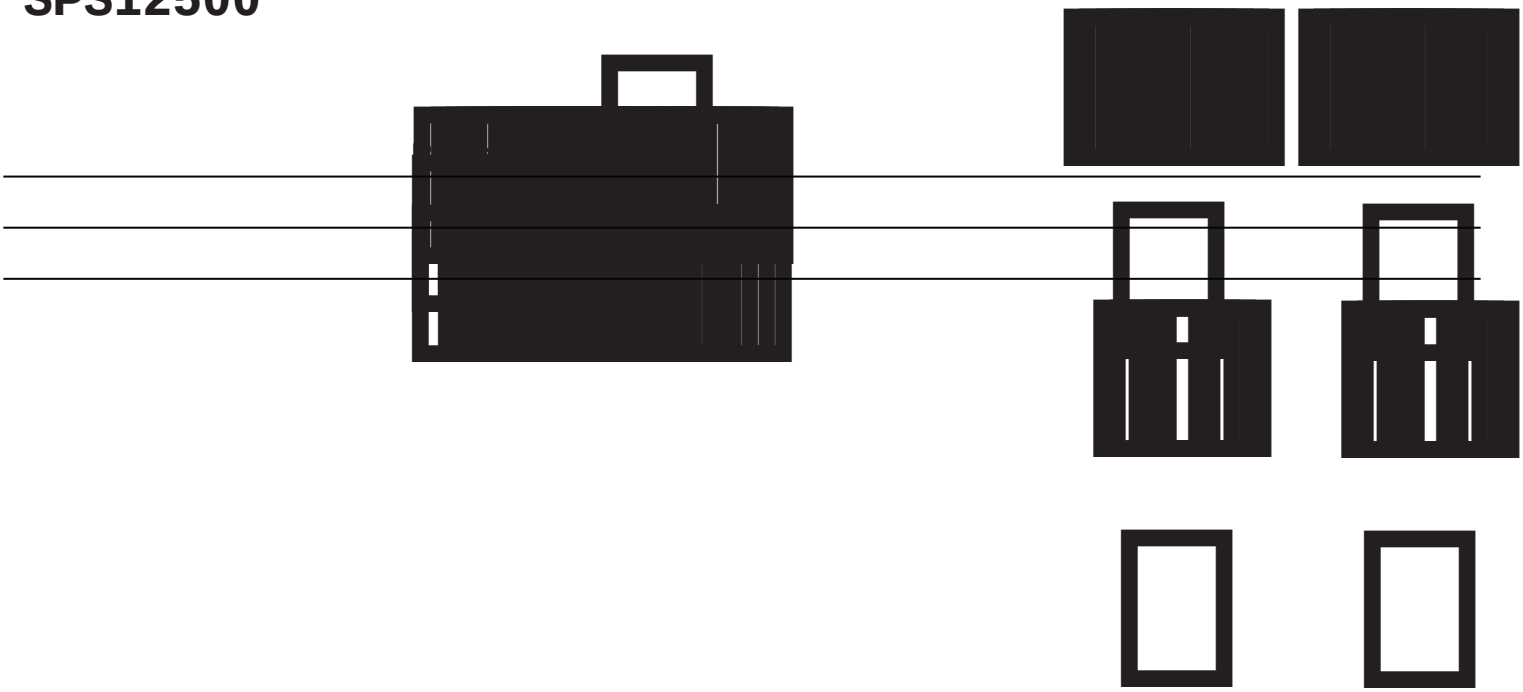

NOTE

The mentioned speed is the maximum value when the crane is operated without load and under the recommended volumn which with oil temperature 45 ~ 55 .

Subject to change,production tolerances have to be taken into account.

OTE

The weight of the mounting kit was not included in the mentioned crane weight.

Subject to change,production tolerances have to be taken into account.

Dimensions

SPS8000B

Crane

Subject to change,production tolerances have to be taken into account.

Dimensions

SPS8000A

Crane

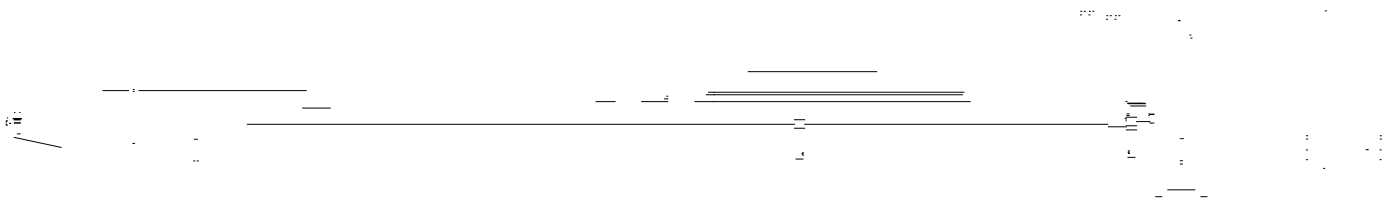

² Ì $ È õN« º fFP œ 63<• X µ Ä
Subject to change,production tolerances have to be taken into account.

SPS8000A

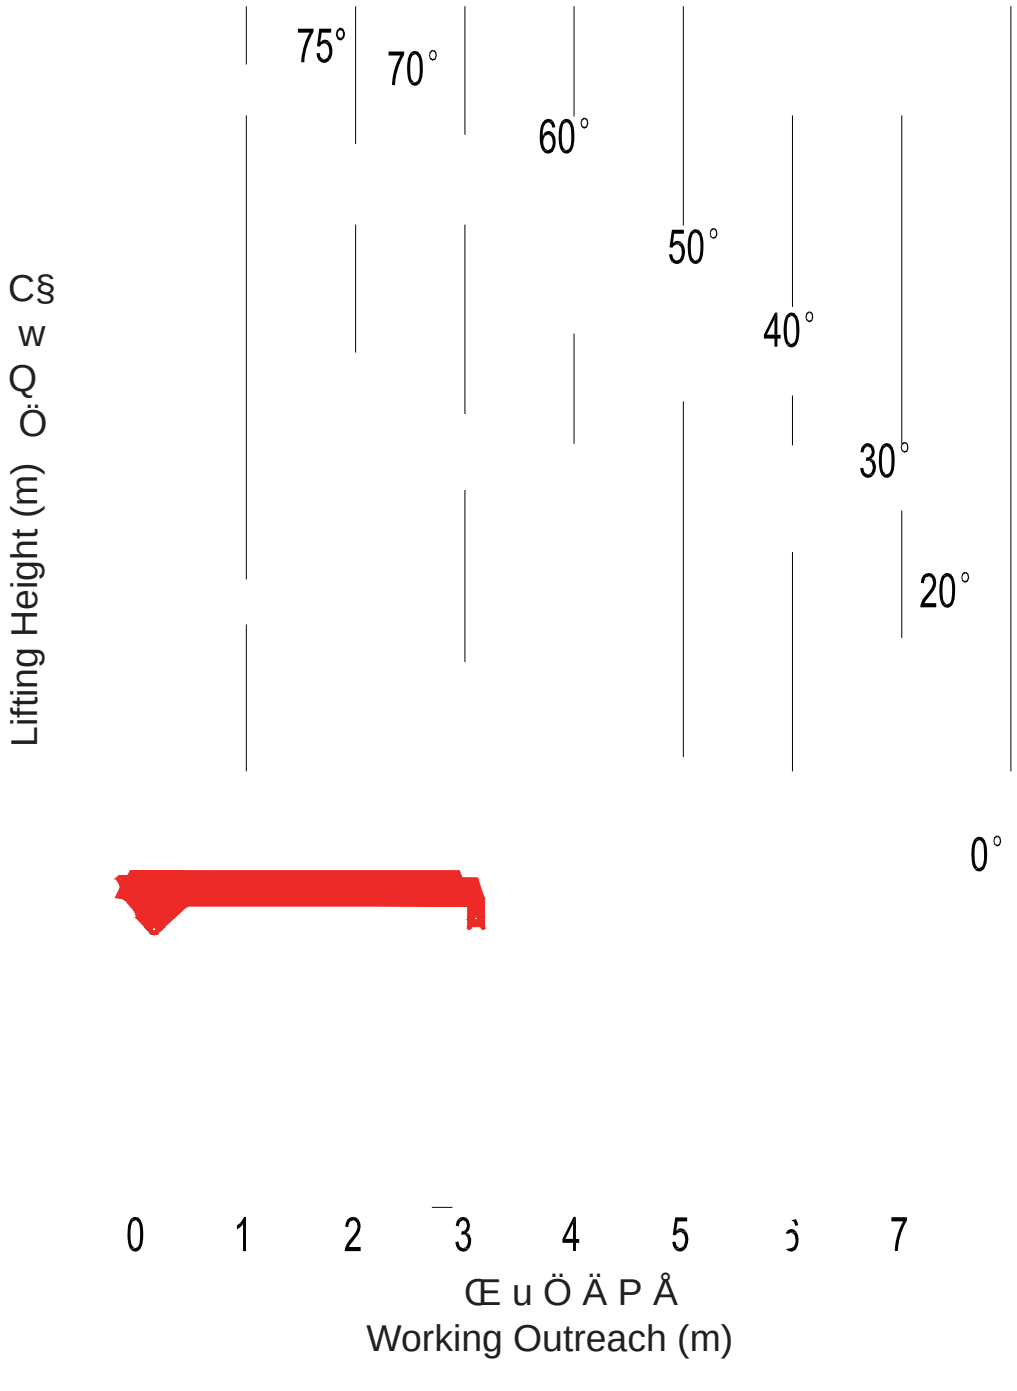

Õ h
Y • ä † ë q † b Ô 9 ú > Ù Á k Ž b ú e • ä † q † 1 G ÿ J k Ì ú > 1 Ý b Ñ
… ñ œ ì ú > ož

NOTE

The above lifting heights and boom angles are based on a straight (unladen) boom.
Allowance should be made for boom deflection under laden conditions.
Lifting capacities must not exceed 85% of tipping load.

Subject to change,production tolerances have to be taken into account.

SPS8000B

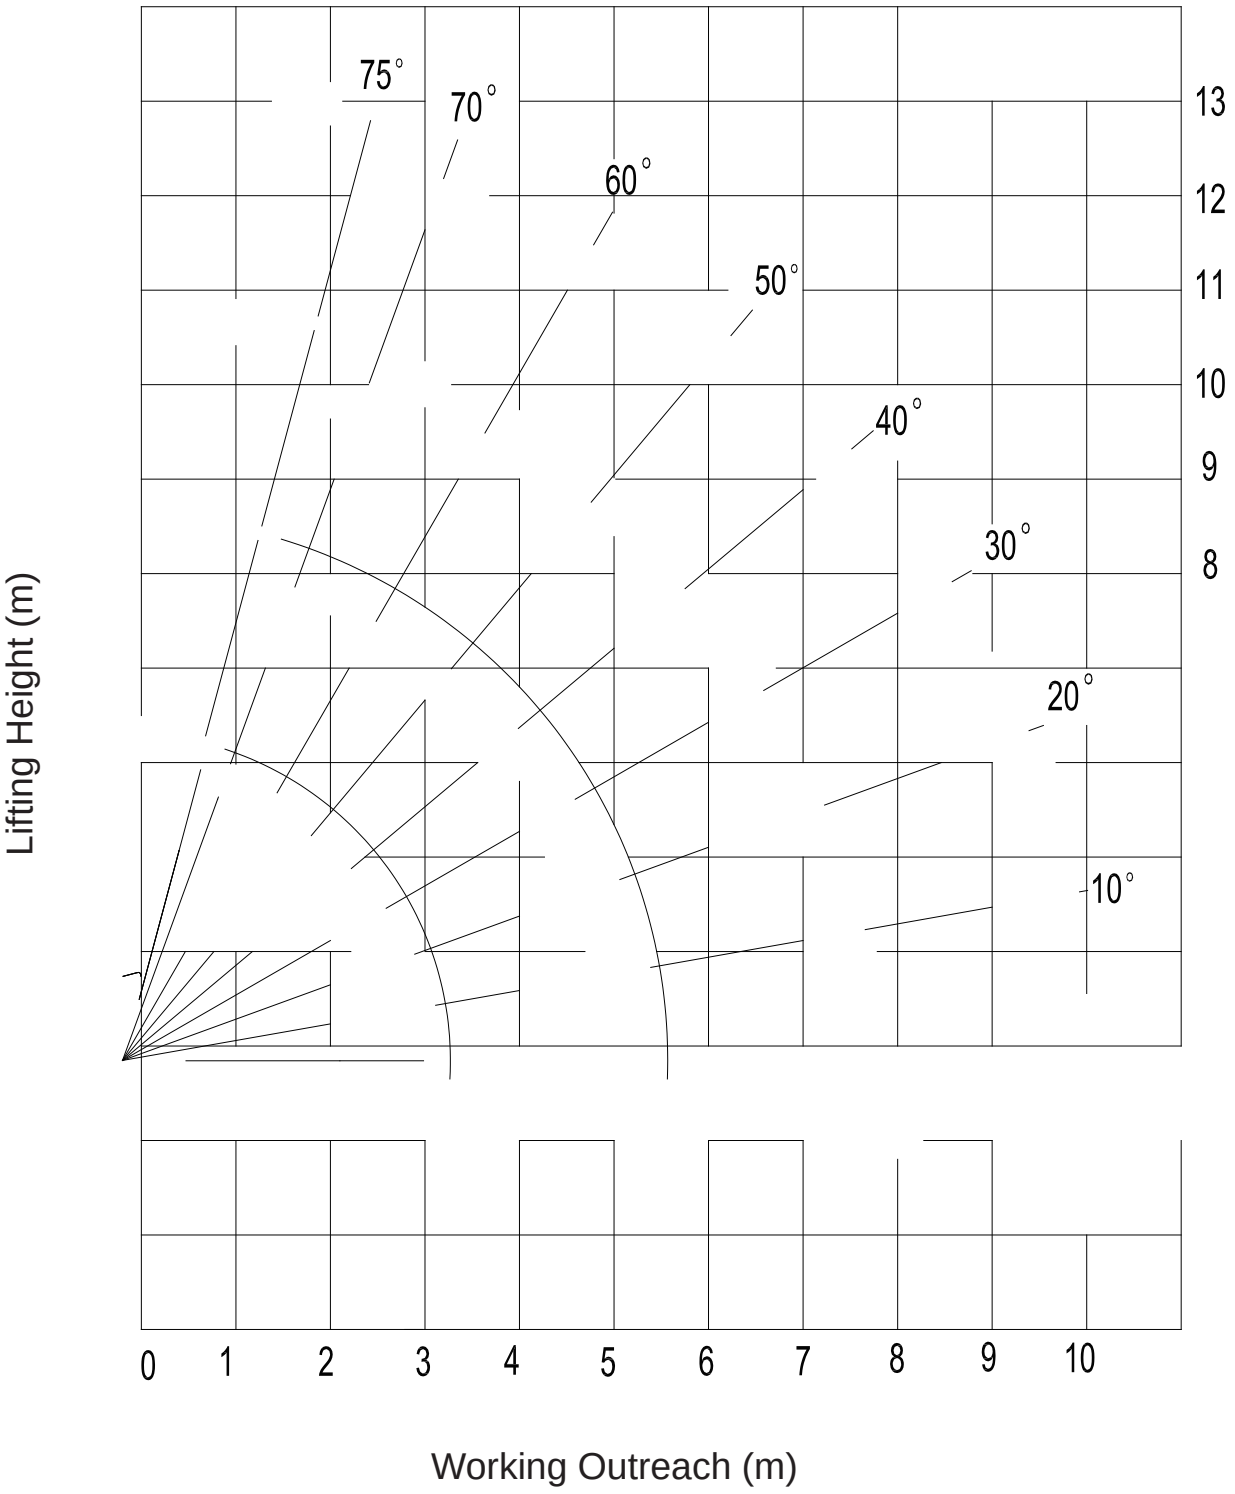

NOTE

The above lifting heights and boom angles are based on a straight (unladen) boom.
Allowance should be made for boom deflection under laden conditions.
Lifting capacities must not exceed 85% of tipping load.

Subject to change,production tolerances have to be taken into account.

Intallation dimension

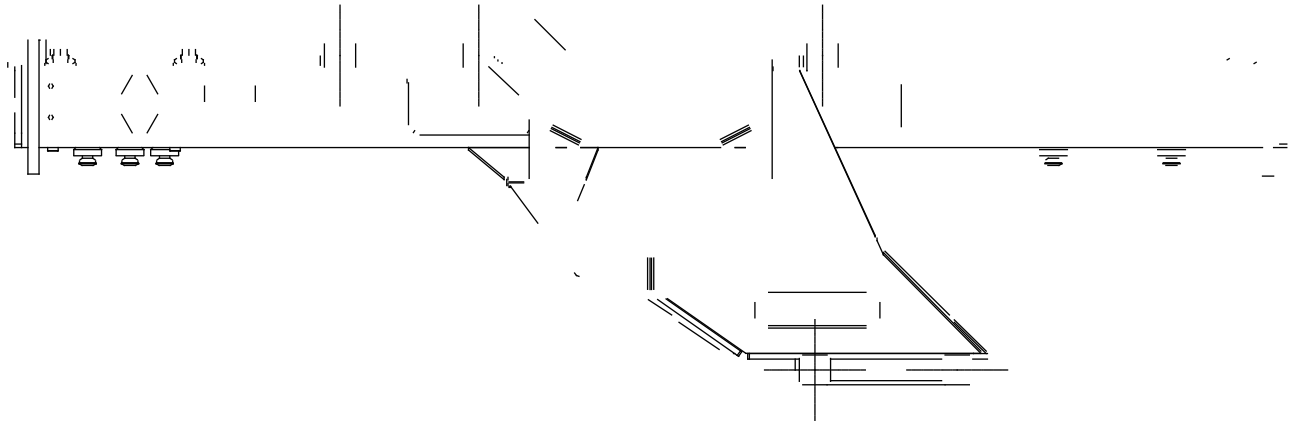

SANY PALFINGER

WWW.SANYPALFINGER.COM