DB-018

Version:07/2016

SANY PALFINGER SPV EQUIPMENT CO.,LTD
Rudong Development Zone, Nantong, Jiangsu, China
Service Hotline: +86 4008 878318
www.sanypalfinger.com

SPS12500

o

Rated lifting capacity

NOTE
The mentioned speed is the maximum value when the crane is operated without load and under the recommended volumn which with oil temperature 45 ~ 55 .

SPS12500

Floor Control

NOTE
The weight of the mounting kit was not included in the mentioned crane weight.

Subject to change,production tolerances have to be taken into account.

Dimensions

SPS35000C-F/L

Crane

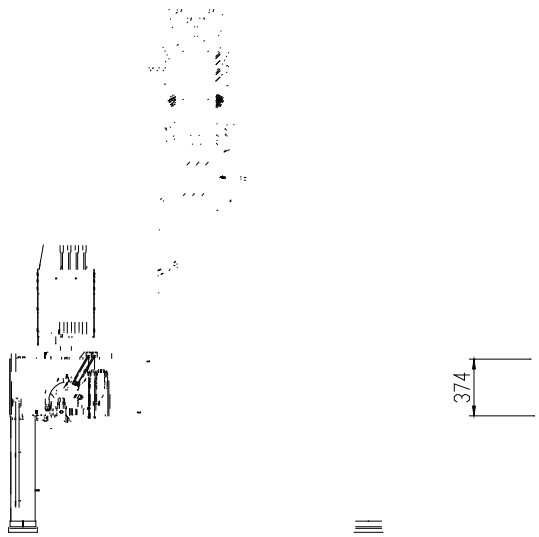

NOTE
The low-seat is optional equipment.

Subject to change,production tolerances have to be taken into account.

Dimensions

SPS35000C-H/M

Crane

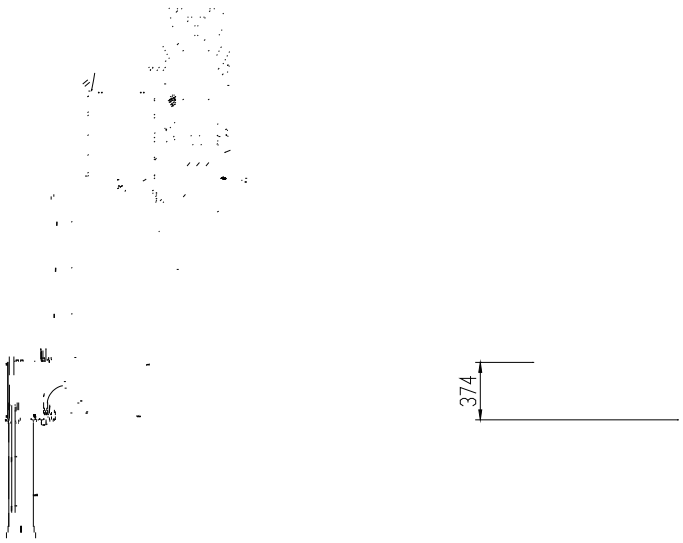

NOTE
The low-seat is optional equipment.

Subject to change,production tolerances have to be taken into account.

SPS35000B

Lifting Height (m)

m
Working Outreach (m)

NOTE

The above lifting heights and boom angles are based on a straight (unladen) boom.
Allowance should be made for boom deflection under laden conditions.
Lifting capacities must not exceed 85% of tipping load.

Subject to change,production tolerances have to be taken into account.

SPS35000C

NOTE

The above lifting heights and boom angles are based on a straight (unladen) boom.
Allowance should be made for boom deflection under laden conditions.
Lifting capacities must not exceed 85% of tipping load.

Subject to change,production tolerances have to be taken into account.

SPS35000B/C

Intallation dimension

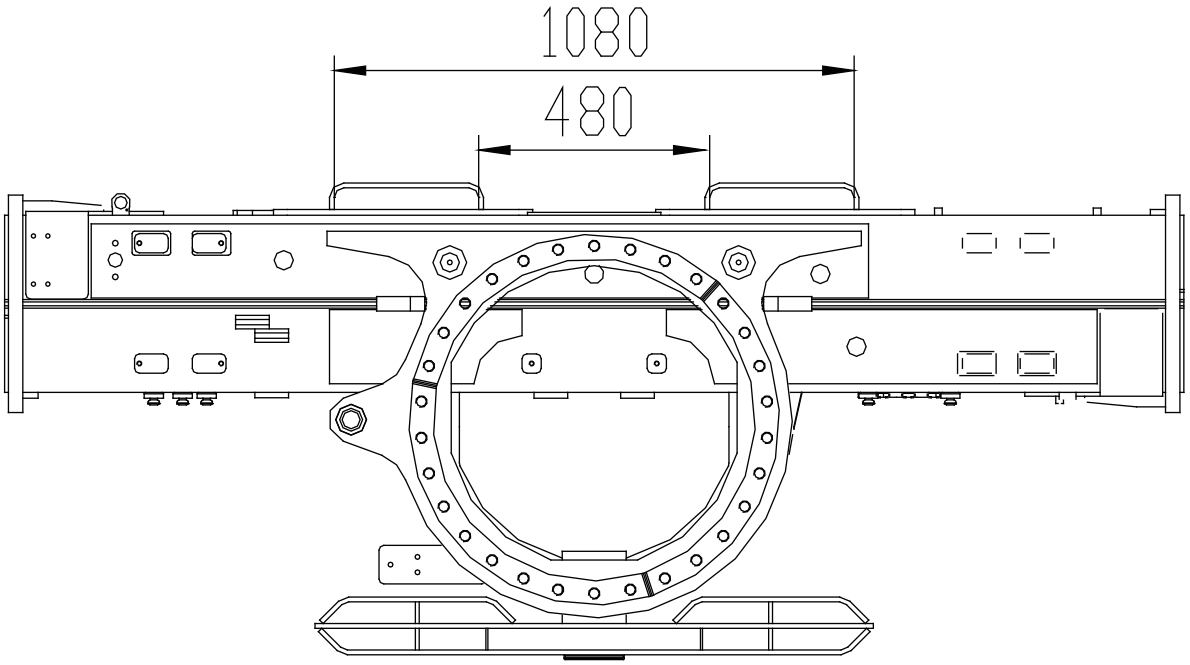

SANY PALFINGER

WWW.SANYPALFINGER.COM